

# Zirshot Ceramic Beads


- Specifically suited to high performance applications.
- High recyclability, efficient whether used in wheel-blast or air-blast (dry or wet) systems.

## TYPICAL CHEMICAL ANALYSIS

ZrO <sub>2</sub>	60 to 70 %
SiO <sub>2</sub>	28 to 33 %
Al <sub>2</sub> O <sub>3</sub>	< 10 %

Chemical analysis carried out by X-Ray fluorescence on melting sample

## DESIGNATION AND AVAILABLE SIZES

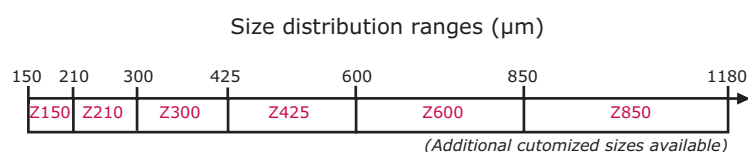

## CRYSTAL STRUCTURE

Zirconia	68 %
Vitreous phase	32 %

Typical values

## PHYSICAL PROPERTIES

Specific gravity	3.85 g/cm <sup>3</sup>
Bulk density	2.30 kg/l
Vickers hardness (Equivalent HRC 50 at 65)*	700 HV1

\* Statistical measurement

- White color, almost spherical and smooth surface
- High toughness, but not very aggressive with equipment and tools
- Chemically inert, non contaminating for treated parts
- Low dust production

## INDUSTRY STANDARDS

- NF L 06-831
- SAE J 1830
- AMS 2431 et 2431/7
- MIL-S-13165C (cancelled)


Product approved by main aeronautics companies (please consult us).

**SPECIFICATION** \_\_\_\_\_ DS SP BD 11

**SAFETY DATA SHEET** \_\_\_\_\_ DS MS BD 11

## PACKAGING

25 kg jerrycan, 50 kg and above palletized

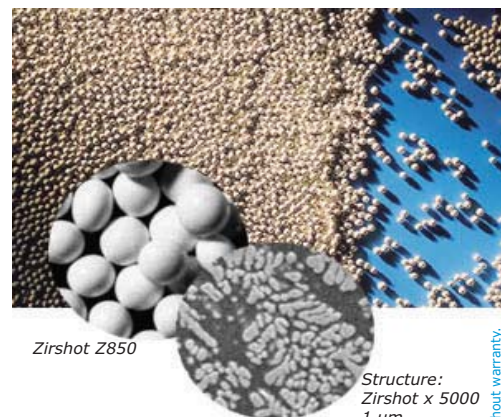

Zirshot Z850

Structure:  
Zirshot x 5000  
1 µm

## MAIN APPLICATIONS

- Shot peening to improve fatigue strength, corrosion, pitting wear, micro-fretting
- Peen-forming
- Peen-straightening

## MAIN USERS

- Aeronautics
- Automotive
- Nuclear, chemical equipments
- Medical prosthesis

SEPR  
ZirPro Department  
B.P. 25 - 84131 Le Pontet Cedex  
France

Tel.: +33 (0)4 90 39 99 14  
Fax: +33 (0)4 90 39 99 98  
e-mail : zirpro@saint-gobain.com

<http://www.zirpro.com>